

MODEL # FWP-ST-7840-2

DESIGN DATA

FRASER WAY PRECAST MODEL # FWP-ST-7840-2
 WEIGHT: LID 5320 LBS
 BOTTOM 10,130 LBS

WORKING VOLUMES:

1ST CHAMBER=	5120 L	1126 I.G.
2ND CHAMBER=	2723L	599 I.G.
TOTAL VOLUME=	7843 L	1725 I.G.
SCUM:	(804 L)	14%

CONCRETE TANK STRUCTURAL REINFORCING (STRUCTURAL REINFORCING DESIGN BY OTHERS)

BASE REBAR


10M @ 12" (305mm) O.C. ON BOTTOM w/12" (305mm) BENT OVERLAP SIDES, 10M UNDER DIVIDE (TOTAL 2)
 4x4 / 10 GA. WWM REINFORCING w/12" (305mm) WRAP EACH END

SIDEWALL REBAR

10M (TOTAL 2) REBAR BENT COLD AT CORNERS WELDED IN LOOP
 4x4 / 10 GA. WWM REINFORCING w/12" (305mm) WRAP EACH END

GASKET: CONCEAL CS-120

CONCRETE STRENGTH: 25 MP's MINIMUM
 (USE IN NON-SULPHATE SOILS ONLY)

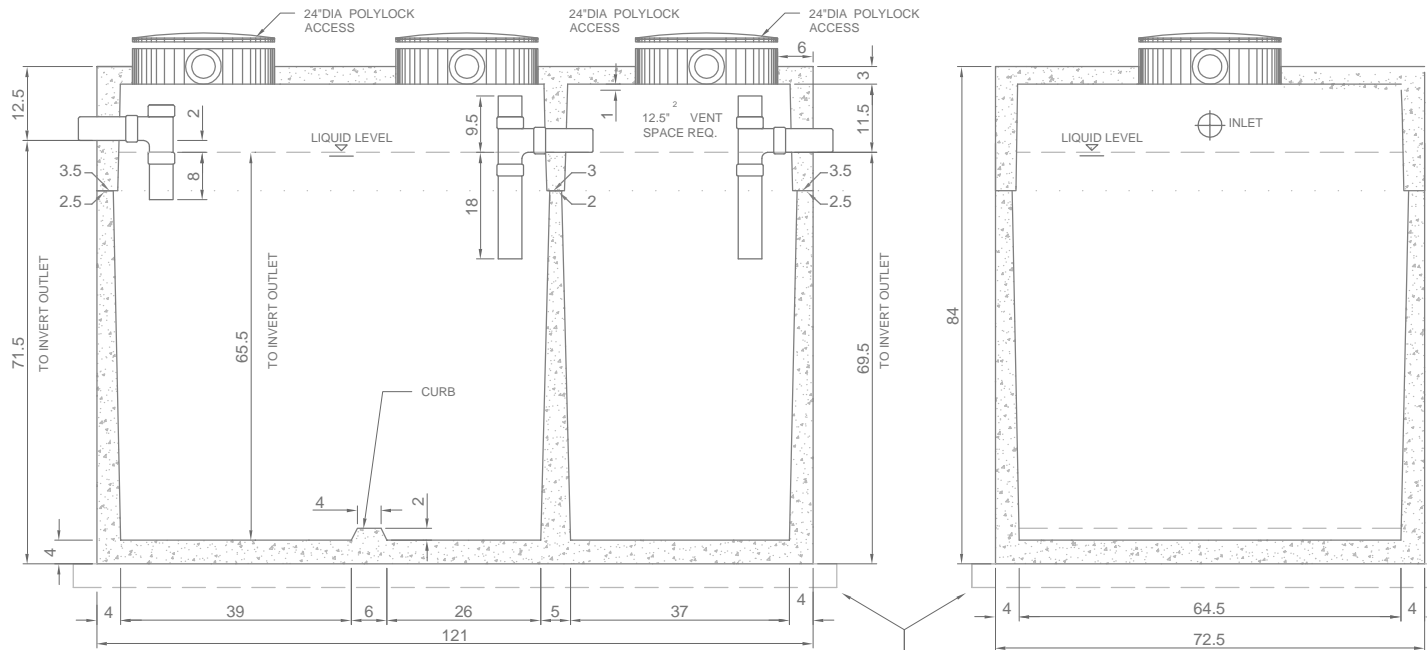

SECTION

SIDE

ALL DIMENSIONS SHOWN IN INCHES

OPTIONAL ANTI-FLOAT BASE. NOTE: SIZING IS SITE SPECIFIC AND REQUIRES ENGINEERING DESIGN AND APPROVAL

FRASERWAY PRECAST LTD

22765 FRASER HIGHWAY
 LANGLEY, BC V3A 4R6
 TEL: 604-534-2911 FAX: 604-533-3238
 EMAIL: INFO@FRASERWAYPRECAST.COM
 WWW.FRASERWAYPRECAST.COM

**7800 L (1700 gal) - 2 CHAMBER 2 PIECE
 CONCRETE SEPTIC TANK
 PLAN, SIDE AND SECTION**

DRAWN: EJP	SHEET: 1 / 1	FILE NO. 1700	REV:
DATE: JUNE 26, 2010			

PLAN